


# 2019 Anticipated East Salem Construction



OREGON

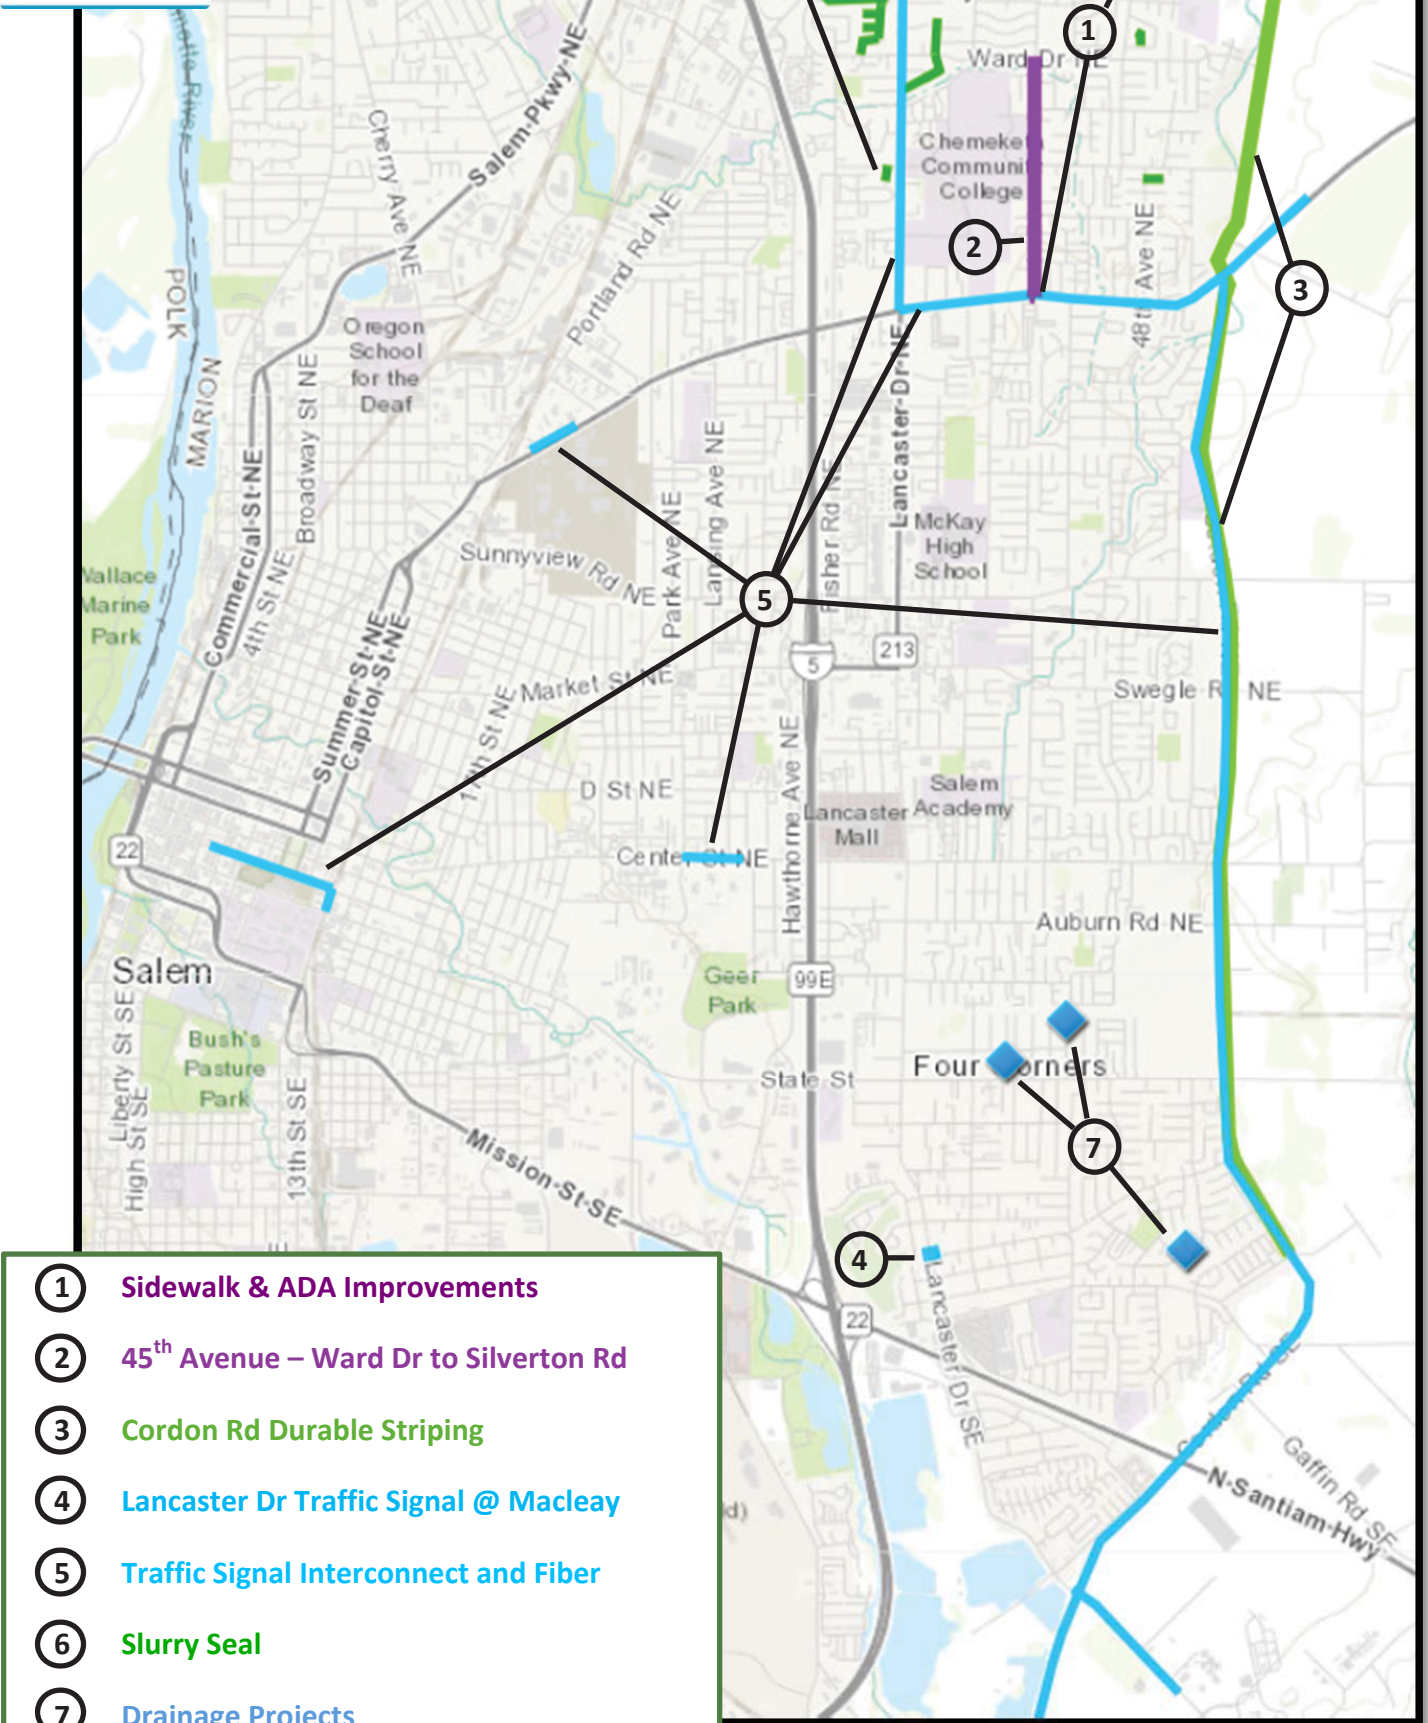

- ① Sidewalk & ADA Improvements
- ② 45<sup>th</sup> Avenue – Ward Dr to Silverton Rd
- ③ Cordon Rd Durable Striping
- ④ Lancaster Dr Traffic Signal @ Macleay
- ⑤ Traffic Signal Interconnect and Fiber
- ⑥ Slurry Seal
- ⑦ Drainage Projects

Project Name	Description
<b>Sidewalk &amp; ADA Improvements</b>	This contract consists of constructing new ADA accessible ramps and sidewalk segments on County roadways. This year, projects will be constructed on Silverton Road, Hayeseville Drive, Delaney Road, and Main Street in Donald.
<b>Curb Replacement</b>	Spring repairs to the curb and gutter on 37th Avenue and Treeside Drive are needed to prepare them for a summer slurry seal application.
<b>45th Avenue - Ward Drive to Silverton Road</b>	The project will improve 45th Avenue between Ward Drive and Silverton Road, adding sidewalks and bike lanes for the full length of the project. Stormwater improvements will be included in this project which will be constructed over two construction seasons and be completed in 2020.
<b>Cordon Rd NE Durable Pavement Striping</b>	Durable centerline striping will be installed to improve visibility and complete the 2018 rumble strip project.
<b>Lancaster Dr Traffic Signal Replacement at Macleay</b>	Scheduled to begin late summer, this project will replace the outdated traffic signal with a new modern signal as well as sidewalk and ramp improvements at the intersection.
<b>Traffic Signal Interconnect and Fiber</b>	This project, done in partnership with the City of Salem, will begin this fall and will connect Marion County and Salem traffic signals, Marion County Health Dept, Marion County Public Works, and the Salem traffic operations center.
<b>Slurry Seal</b>	Slurry Seal is a treatment used to extend the life of pavements on local streets. A total of 2.84 Miles of County roadway are expected to receive slurry seal treatment in 2019. Hot weather is the best for the slurry operation, so late summer construction is normal.

### **Drainage Projects**

<b>Buffalo Dr Junction Box Installation</b>	Installation of a new junction box and catch basin at the exit from Mary Eyre Elementary. The current system does not allow adequate access for clearing the pipes when they are plugged or restricted by debris. Construction will occur between June 11 and July 12, 2019.
<b>Eldin Av Pipe Replacement</b>	This project includes replacing 240 feet of existing pipe with larger pipe and reshaping the drainage channel to improve stormwater flow. Construction will be complete by October.
<b>Draper St Storm System</b>	Approximately 475 feet of pipe will be installed from the cul-de-sac toward Hudson Avenue to relieve area flooding. Construction will be completed this summer.