MARION COUNTY DEPARTMENT OF PUBLIC WORKS

PARKDALE MITIGATION

October 2001

SEED DIAGRAM

1"=50'

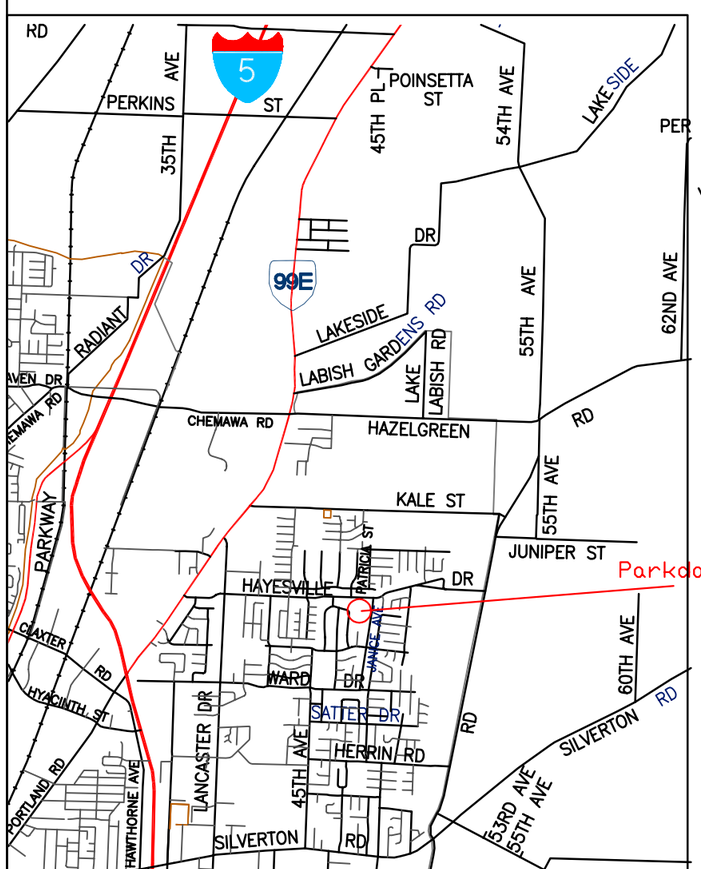

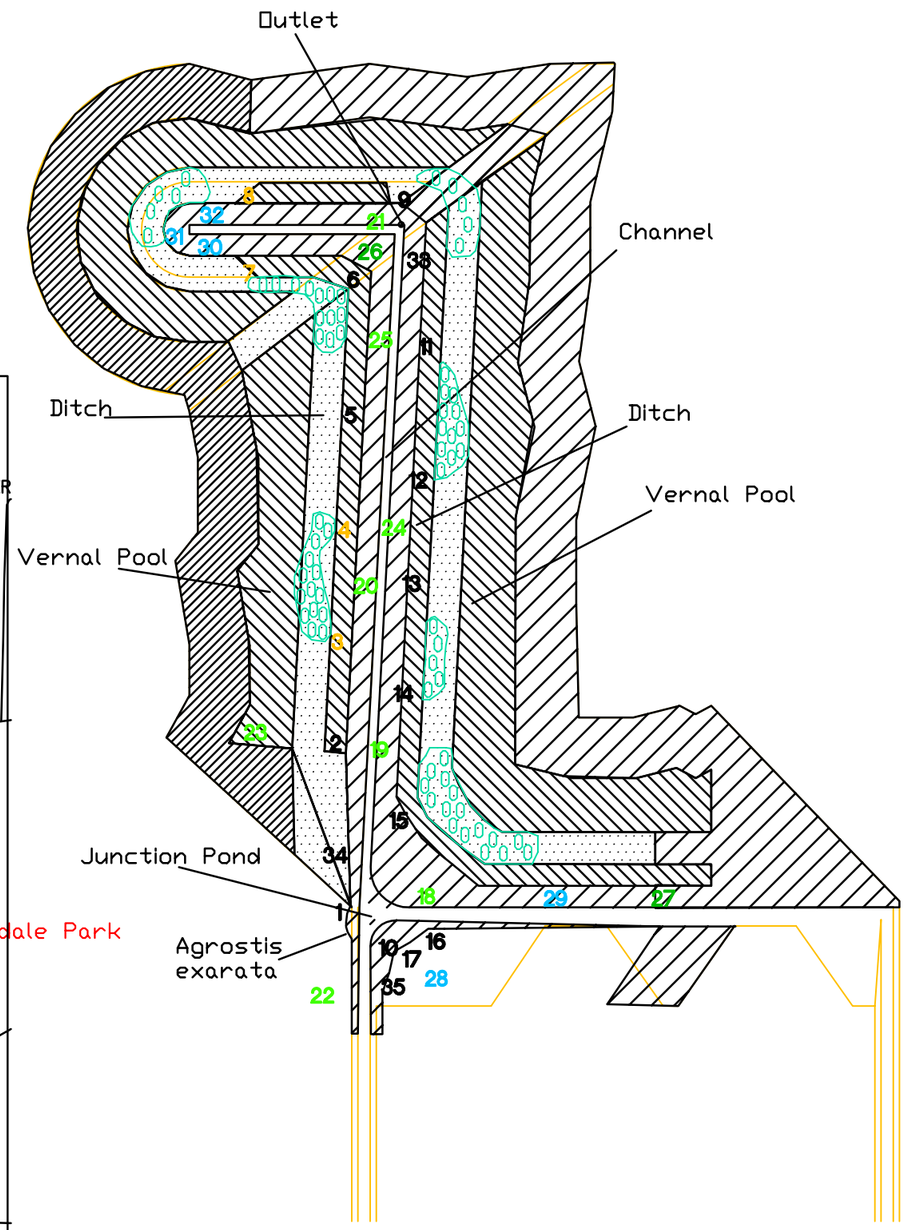

LEGEND

- Beckmannia syzigachne
- Hordeum brachyantherum
- Elymus glaucus
- Deschampsia cespitosa
- Ash Trees 2002 Planting
  Number of 0 equals quantity of ash trees
  Note: 70 ash trees planted on 6' centers

Total Usage:	
Carex deweyana	0.188 lbs.
Carex comosa	0.063 lbs.
Potentilla gracilis	0.218 lbs.
Veronica anagallis-aquatica	0.028 lbs.
Vicia cracca	0.069 lbs.
Plagiobothrys nigricans	0.141 lbs.
Deschampsia cespitosa	25 lbs.
Hordeum brachyantherum	20 lbs.
Elymus glaucus	25 lbs.
Agrostis exarata	0.5 lbs.

Number	Name	Seeding Rate				Origination	Location
1	Carex deweyana	0.375 oz/sq ft	8"	0.0017 lbs./ft²		HCPW	West side of the junction pond
2	Carex deweyana	0.375 oz/sq ft	8"	0.0017 lbs./ft²		HCPW	West side of Southern portion of Ditch
3	Carex obnupta	0.225 oz/sq ft	8"	0.0010 lbs./ft²		HCPW	In ditch 50 linear feet previous number
4	Carex obnupta	0.225 oz/sq ft	16"	0.0069 lbs./ft²		HCPW	In ditch 50 linear feet previous number
5	Carex deweyana	0.2 oz/sq ft	8"	0.0011 lbs./ft²		HCPW	In ditch 50 linear feet previous number
6	Carex deweyana	0.2 oz/sq ft	8"	0.0011 lbs./ft²		HCPW	In ditch 50 linear feet previous number along corner
7	Carex obnupta	0.275 oz/sq ft	8"	0.0019 lbs./ft²		HCPW	In ditch 50 linear feet previous number at Bend of the West Ditch on the S
8	Carex obnupta	0.275 oz/sq ft	8"	0.0019 lbs./ft²		HCPW	In Ditch at the West end Halfway of West Ditch on the Northern side
9	Carex deweyana	0.375 oz/sq ft	8"	0.0019 lbs./ft²		HCPW	In ditch 50 linear feet previous number
10	Carex deweyana	0.375 oz/sq ft	8"	0.0019 lbs./ft²		HCPW	North end of West Ditch NW corner
11	Carex deweyana	0.2 oz/sq ft	8"	0.0011 lbs./ft²		HCPW	Hordeum brachyantherum 50 linear feet previous number
12	Carex deweyana	0.2 oz/sq ft	8"	0.0011 lbs./ft²		HCPW	Hordeum brachyantherum 50 linear feet previous number
13	Carex deweyana	0.2 oz/sq ft	8"	0.0011 lbs./ft²		HCPW	Hordeum brachyantherum 50 linear feet previous number
14	Carex deweyana	0.2 oz/sq ft	8"	0.0011 lbs./ft²		HCPW	Hordeum brachyantherum 50 linear feet previous number
15	Carex deweyana	0.2 oz/sq ft	8"	0.0011 lbs./ft²		HCPW	Hordeum brachyantherum 50 linear feet previous number
16	Carex deweyana	0.2 oz/sq ft	8"	0.0011 lbs./ft²		HCPW	SE side of the junction pond
17	Carex deweyana	0.2 oz/sq ft	8"	0.0011 lbs./ft²		HCPW	SE side of the junction pond
18	Potentilla gracilis	0.033 oz/sq ft	8"	0.0006 lbs./ft²		HCPW	SE portion of East ditch on the Southern side
19	Potentilla gracilis	0.033 oz/sq ft	16"	0.0017 lbs./ft²		HCPW	Between Ditch sheet 2
20	Potentilla gracilis	0.033 oz/sq ft	8"	0.0006 lbs./ft²		HCPW	In between 1 and 2 on West side
21	Potentilla gracilis	0.033 oz/sq ft	12"	0.0011 lbs./ft²		HCPW	NW side of Ditch
22	Potentilla gracilis	0.2 oz/sq ft	8"	0.0026 lbs./ft²		HCPW	South side of the junction pond
23	Potentilla gracilis	0.5 oz/sq ft	16"	0.0026 lbs./ft²		HCPW	SW corner of Western Vernal Pool
24	Potentilla gracilis	0.375 oz/sq ft	8"	0.0026 lbs./ft²		HCPW	Between Ditch 3 and channel
25	Potentilla gracilis	0.375 oz/sq ft	8"	0.0026 lbs./ft²		HCPW	Between Ditch 4 and channel
26	Nasturtium officinale	0.25 oz/sq ft	8"	0.0017 lbs./ft²		HCPW	NE corner of Channel
27	Nasturtium officinale	0.2 oz/sq ft	8"	0.0011 lbs./ft²		HCPW	East side of East Channel
28	Vicia cracca	0.2 oz/sq ft	16"	0.0066 lbs./ft²		PhWh	Between 1 and 2 on the junction pond
29	Vicia cracca	0.2 oz/sq ft	16"	0.0066 lbs./ft²		PhWh	Between 1 and 2 on Eastern Channel
30	Vicia cracca	0.2 oz/sq ft	8"	0.0011 lbs./ft²		PhWh	West Channel the corner
31	Vicia cracca	0.2 oz/sq ft	8"	0.0011 lbs./ft²		PhWh	West Channel the Corner
32	Vicia cracca	0.2 oz/sq ft	8"	0.0011 lbs./ft²		PhWh	West Channel the corner
33	Plagiobothrys nigricans	0.5 oz/sq ft	8"	0.0035 lbs./ft²		PhWh (seed)	Near Road rock Crossing
34	Plagiobothrys nigricans	0.375 oz/sq ft	8"	0.0052 lbs./ft²		PhWh (seed)	Between 1 and 2
35	Plagiobothrys nigricans	1 oz/sq ft	8"	0.0026 lbs./ft²		PhWh (seed)	South side of the junction pond
	Agrostis exarata	0.5 lbs.				PhWh (seed)	
	Deschampsia cespitosa	5 lbs.				PhWh (seed)	
	Deschampsia cespitosa	20 lbs.				HH	
	Hordeum brachyantherum	20 lbs.				PhWh	
	Elymus glaucus	25 lbs.				HH	

LAYERS USED:
0,00,LABEL_NEW, LEDGEND, NEWDITCH, SEED_NO, TITLE, VEG2001, VPORTS, 2001 ASH PLANTING

Date:	Project:	Prepared by:
11/13/01	H:\Eng\Parks\Parkdale\Parkdale_seed	SMC