

SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1-A30, AE, AH, A (with BFE), V1-V30, VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.


I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

Roger W Moreland 103365 (Oregon)
 CERTIFIER'S NAME LICENSE NUMBER (or Affix Seal)
President Moreland Surveying Inc.
 TITLE COMPANY NAME
PO Box 5881 Salem OR 97304
 ADDRESS CITY STATE ZIP
Roger W Moreland 4-20-98 (503) 364-9534
 SIGNATURE DATE PHONE

Copies should be made of this Certificate for: 1) community official, 2) insurance agent/company, and 3) building owner.

COMMENTS: Vertical datum based on City of Salem Benchmark #7019 having a published elevation of 257.68

During a flood on Feb 7th, 1996, Mr Condon painted the high water mark on a steel fence post near his home. I obtained an elevation of 262.6 at this mark. The ground elevation at the base of this post is 260.4

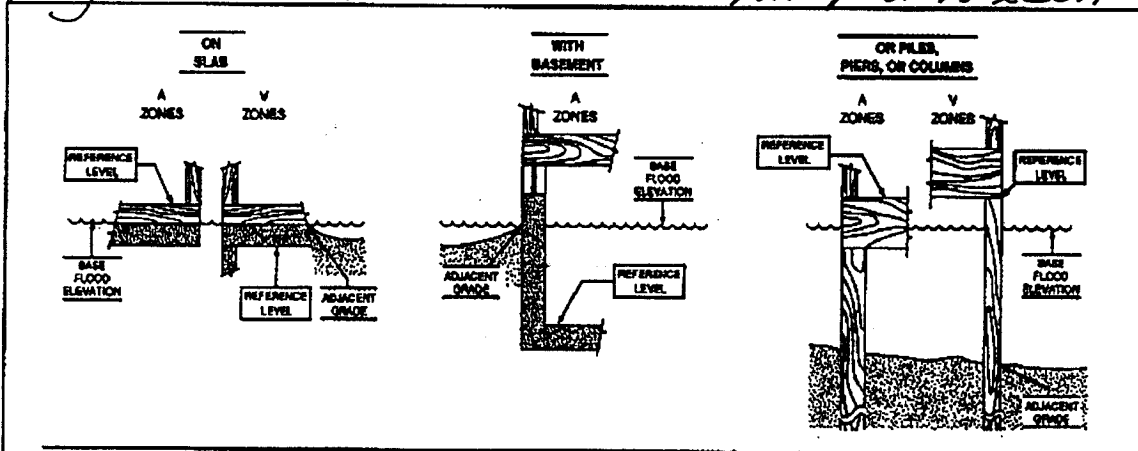

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones. Elevations for all A Zones should be measured at the top of the reference level floor. Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.

**REGISTERED
 PROFESSIONAL
 LAND SURVEYOR**

Roger W. Moreland

OREGON
 AUGUST 22, 1975
 ROGER W. MORELAND
 1033